

Sliding & folding door gear

HENDERSON




*Doors not supplied by Henderson

www.pchenderson.co.za

Husky 100

HUSKY 100 For Sliding Wood & Metal Doors up to 100Kg

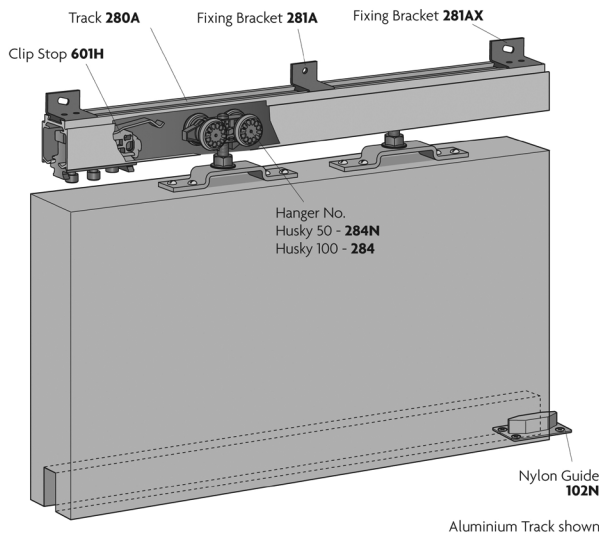

Kit	Door Width
27-664060	Husky 100 Kit (H100/15A) - Alu. Track - Max 800mm
27-664061	Husky 100 Kit (H100/18A) - Alu. Track - Max 950mm
27-664062	Husky 100 Kit (H100/20A) - Alu. Track - Max 1050mm
27-664063	Husky 100 Kit (H100/24A) - Alu. Track - Max 1250mm
27-665537	Husky 100 Kit (H100/15) - Steel Track - Max 800mm
27-665538	Husky 100 Kit (H100/18) - Steel Track - Max 950mm
27-665539	Husky 100 Kit (H100/20) - Steel Track - Max 1050mm
27-665540	Husky 100 Kit (H100/24) - Steel Track - Max 1250mm
27-669174	Husky 100Kg Soft Stop Kit (Wood Door)
27-664902	F140 FASCIA PACK 2000mm (F140/20) - Incl. Endcaps
27-664903	F140 FASCIA PACK 3000mm (F140/30) - Incl. Endcaps
27-669235	SLIDOCLOSE - Pneumatic Closing System (SC100)

For heavy weight room dividers

For timber, timber framed or composite doors

Not suitable for doors less than 25kg

Easily adjustable door height

End clip stop to hold door in open position

Floor component - Nylon

Guide with channel available as non-standard option

Simultaneous action option

Low headroom function also available

Specification:

Maximum door weight: 100kg

Minimum door weight: 25kg


Maximum door width: 1250mm

Maximum door height: 2700mm

Door thickness: 20-50mm

Marathon 90

Marathon 90 For Sliding Doors up to 90Kg

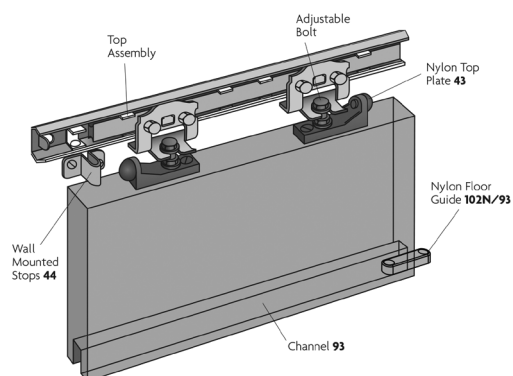

Kit	Door Width
27-789407	Marathon Kit S2 - Opening 400-750mm
27-789558	Marathon Kit S3 - Opening 750-900mm
27-789589	Marathon Kit S4 - Opening 900-1050mm
27-789613	Marathon Kit S5 - Opening 1050-1200mm
27-790822	Marathon Kit S6 - Opening 1200-1500mm
27-790853	Marathon Kit S7 - Opening 1500-1800mm
27-790884	Marathon Kit S8 - Opening 1800-2000mm
27-790918	Marathon Kit S9 - Opening 2000-2500mm
27-789527	Marathon Fire Door Kit - Fdk1

For heavy-duty domestic and light commercial applications, doors and partitions

For timber, timber framed or composite doors

Easily adjusted door height

Fire door kit available (single doors only)

Self closing Kit option for doors up to 60kg (SCK1)

Simultaneous action option

Specification:

Max. door weight: 90kg


Max. door width: 1500mm

Max. door height: 3000mm

Door thickness: 32-50mm

Marathon 55

Marathon 55 For Sliding Doors up to 55 Kg

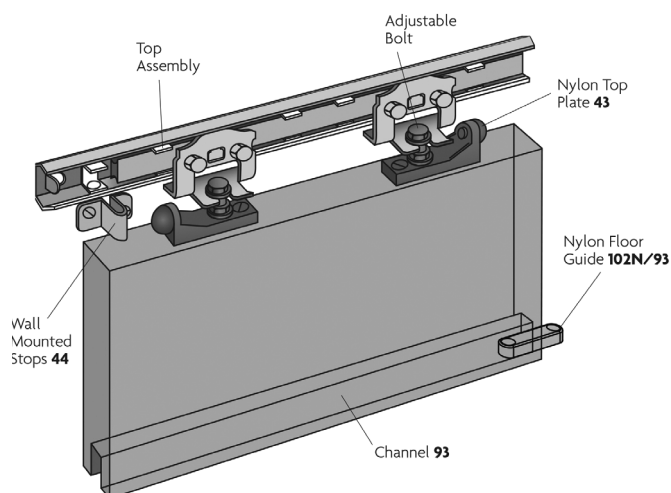

Kit	Door Width
27-789400	Marathon Kit J2 - Opening 400-750mm
27-789431	Marathon Kit J3 - Opening 750-900mm
27-789462	Marathon Kit J4 - Opening 900-1050mm
27-789493	Marathon Kit J5 - Opening 1050-1200mm
27-790695	Marathon Kit J6 - Opening 1200-1500mm

For heavy-duty domestic and light commercial applications, doors and partitions

For timber, timber framed or composite doors

Easily adjusted door height

Self closing Kit option for doors up to 60kg (SCK1)

Simultaneous action option

Specification:

Max. door weight: 55kg


Max. Door Width: 1500mm

Max. Door Height: 3000mm

Door Thickness: 32-50mm

Single Top

Single Top For Single Track Wardrobe Doors up to 45Kg

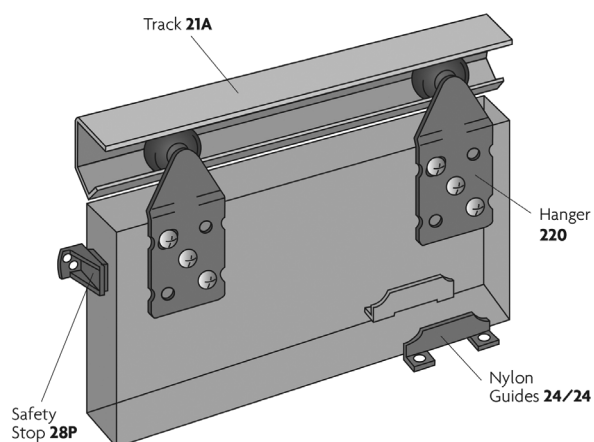

Kit	Door Width
27-790949	Single Top Kit St12 - Max 600mm
27-790963	Single Top Kit St15 - Max 750mm
27-790987	Single Top Kit St18 - Max 900mm

For timber framed composite doors

Silent Nylon wheeled ball bearing hangers and aluminium track

Easily adjusted door height

Floor component guide only

Specification:

Max. door weight: 45kg


Max. door width: 900mm

Max. door height: 2400mm

Door thickness: 16-40mm

Husky 50

HUSKY 50 For Silent Wood Doors up to 50Kg

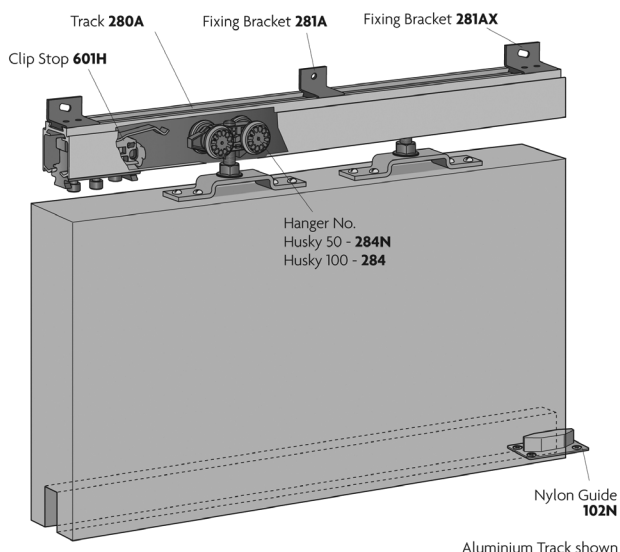

Kit	Door Width
27-664068	Husky 50 Kit (H50/15A) - Alu. Track - Max 800mm
27-664069	Husky 50 Kit (H50/18A) - Alu. Track - Max 950mm
27-664070	Husky 50 Kit (H50/20A) - Alu. Track - Max 1050mm
27-664071	Husky 50 Kit (H50/24A) - Alu. Track - Max 1250mm
27-665553	Husky 50 Kit (H50/15) - Steel Track - Max 800mm
27-665554	Husky 50 Kit (H50/18) - Steel Track - Max 950mm
27-665555	Husky 50 Kit (H50/20) - Steel Track - Max 1050mm
27-665556	Husky 50 Kit (H50/24) - Steel Track - Max 1250mm
27-669170	Husky 50Kg Soft Stop Kit (Single Damper)
27-370250	Simultaneous Action Kit For Husky Sim100
27-664902	F140 FASCIA PACK 2000mm (F140/20) - Incl. Endcaps to be used with aluminium tracks only
27-664903	F140 FASCIA PACK 3000mm (F140/30) - Incl. Endcaps to be used with aluminium tracks only
27-669235	SLIDOCLOSE - Pneumatic Closing System (SC100)


For timber, timber framed or composite doors
For medium weight doors up to 50kg
Quiet operation - galvanised steel or aluminium track with nylon rollers
Floor component - guide only
Simultaneous action option
Soft stop action in single or double kit option

Specification:

Maximum door weight: 50kg
Maximum door width: 1250mm
Maximum door height: 2700mm
Door thickness: 20-50mm.

Double Top

Double Sliding Wardrobe Doors up to 45Kg

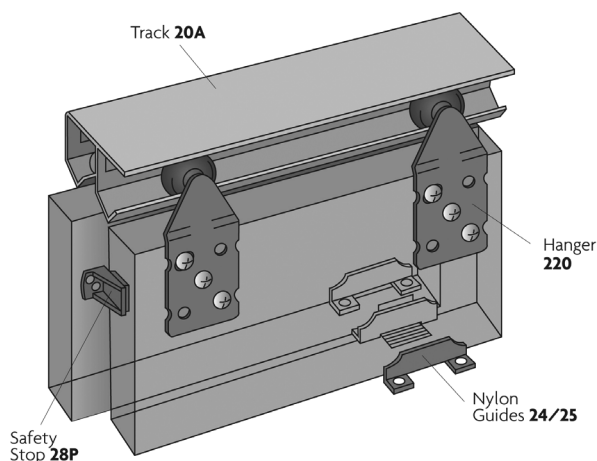

Kit	Door Width
27-792277	Double Top Kit W12 - 2 Leaves - Max 1200mm
27-792291	Double Top Kit W15 - 2 Leaves - Max 1500mm
27-792318	Double Top Kit W18 - 2 Leaves - Max 1800mm
27-792332	Double Top Kit W24 - 3 Leaves - Max 2400mm
27-792356	Double Top Kit W30 - 4 Leaves - Max 3000mm

For heavy duty applications - wardrobes, cupboards, in hotels, schools and offices
For timber, timber framed or composite doors
Silent - nylon wheeled bearing hangers and aluminium track
Easily adjusted door height
Floor component - Nylon
Guide with channel available as a non standard option

Specification:

Maximum door weight: 45kg
Maximum door width: 900mm
Maximum door height: 2400mm
Door thickness: 16-40mm

SLIDOCLOSE

SLIDOCLOSE for Inclusion into kits



Kit	Door Width
27-669235	SLIDOCLOSE - Pneumatic Closing System (SC100)

Pneumatic door closer for doors up to 100kg
 Easy to install
 Can be retrofitted to existing sliding door applications
 Comes complete with fascia
 Available in a chrome finish
 No power source required
 Door speed adjustment settings
 Suitable for left or right hand openings

Specification:


Power force start (kgf) 1.5
 Power force extended (kgf) 4.1
 Maximum door weight 100kg
 Maximum door width 1270mm

*Based on a smooth rolling system with less than 1.0kg table moving force

*BS EN1527

Phantom

Phantom For Silent Doors up to 45Kg

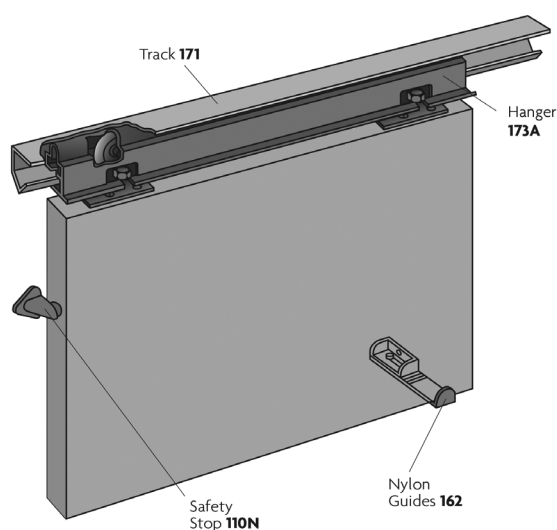

Kit	Door Width
27-792961	Phantom Kit P9 - Opening 610-915mm


For room dividers - for residential, hospital and hotel use
 For timber, timber framed or composite doors
 Ultra silent, frictionless, easy operation
 Floor component - guide only
 Simultaneous action option

Specification:

Max. door weight: 45kg
 Max. door width: 610-915mm
 Max. door height: 2400mm
 Door Thickness: 30-50mm

Senator

Senator For Sliding Doors up to 30Kg

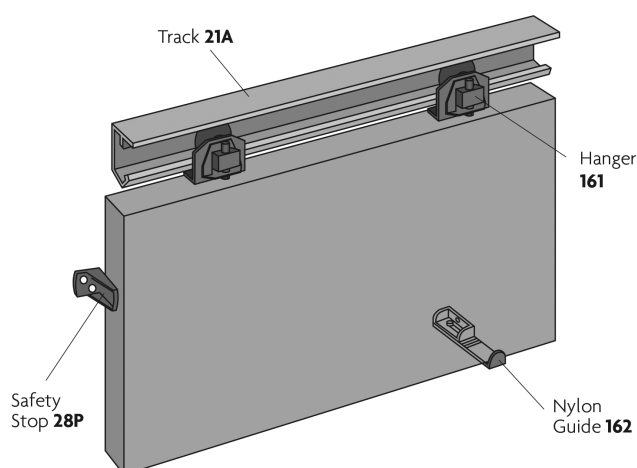

Kit	Door Width
27-791065	Senator KitSan - Max 900mm


For entrance doors and doors between rooms
For timber, timber framed or composite doors
Silent - nylon guides and hangers on aluminium track
Floor component - guide only

Specifications:

Max. door weight: 30kg
Max. door width: 900mm
Max. door height: 2400mm
Door thickness: 20-35mm

Slipper

Slipper For Cupboard up to 9Kg

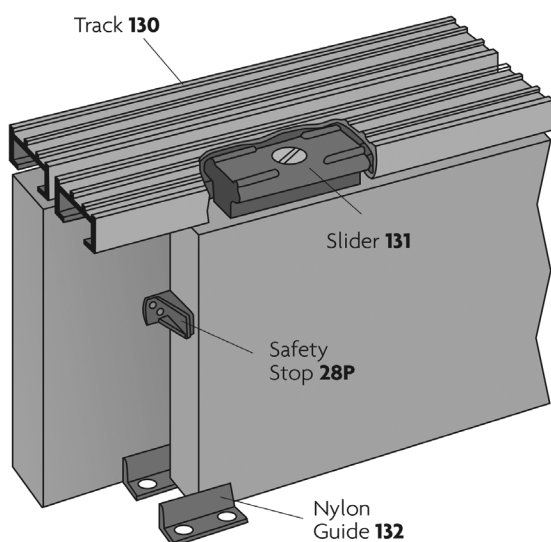


Kit	Door Width
27-789730	Slipper Kit Ss4 - 2 Leaves - Max 1200mm
27-789761	Slipper Kit Ss5 - 2 Leaves - Max 1500mm
27-789792	Slipper Kit Ss6 - 2 Leaves - Max 1800mm

For fitted furniture of all kinds e.g. kitchens, bathrooms,
serving hatches of lightweight wood or chipboard
Quiet nylon slides on attractive aluminium track
Easily top fixed
Simple to remove doors for cleaning

Specification:

Max. door weight: 9kg
Max. door width: 900mm
Max. door height: 1800mm
Door thickness: 16-30mm

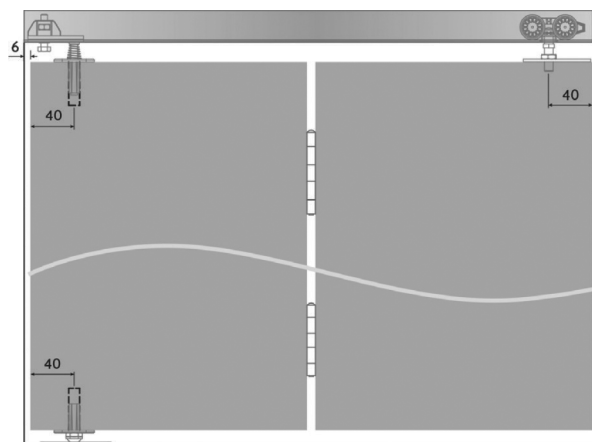Husky 40**Husky Folding Doors up to 40Kg**

Kit	Door Width
27-665565	Husky 40 Folding Kit (Hf40/15) - 2 Leaves - Max 1500mm
27-665566	Husky 40 Folding Kit (Hf40/30) - 4 Leaves* - Max 3000mm

For timber, timber framed or composite doors

For light residential folding partitions

Neatly stacking at one or both sides

Concealed fixing

Floor component - pivot only

Specification:

Max. door weight: 40kg

Max. door width: 750mm


Max. door height: 2700mm

Door thickness: 20-44mm

*Can be neatly stacked to one or both sides with an extra top & bottom pivot

- Bottom Pivot (289B)

- Top Pivot (289T)

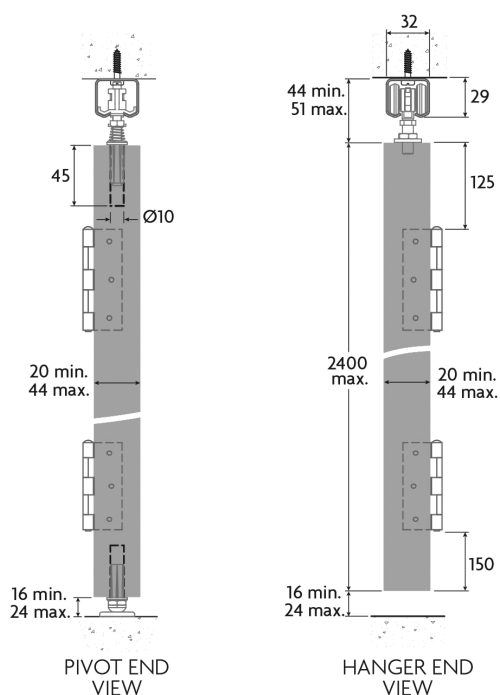Husky 25**Husky Folding 25 For Doors up to 25Kg**

Kit	Door Width
27-665572	Husky 25 Folding Kit (Hf25/12) - 2 Leaves - Max 1200mm
27-665573	Husky 25 Folding Kit (Hf25/24) - 4 Leaves* - Max 2400mm

For timber, timber framed or composite doors

For light residential folding partitions

Neatly stacking at one or both sides

Concealed fixing

Floor component - pivot only

Specification:

Max. door weight: 25kg

Max. door width: 600mm

Max. door height: 2400mm

Door thickness: 20-44mm


*Can be neatly stacked to one or both sides with an extra top & bottom pivot

- Bottom Pivot (289B)

- Top Pivot (289T)

Bifold

Bifold For Folding Wardrobe Doors up to 14Kg

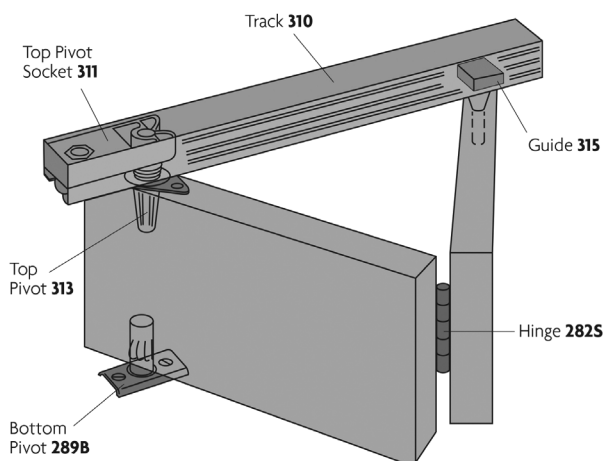

Kit	Door Width
27-789132	Bifold Kit B10 - 2 Leaves - Max 1065mm
27-799194	Bifold Kit B15 - 4 Leaves - Max 1525mm
27-799259	Bifold Kit B20 - 4 Leaves - Max 2135mm
27-789262	Bifold Kit B20 - 2 Leaves - Max 2461mm

For timber, timber framed or composite doors

Stable and smooth running

Suitable for jambless openings

Silent and easy to fix - nylon spring-loaded guides with

attractive aluminium top track

Leaves to fold back completely

Specification:

Max. door weight: 14kg


Max. door width: 530mm

Max. door height: 2400mm

Door thickness: 25-30mm

Loretto

Loretto For Sliding Cupboard Doors up to 23Kg

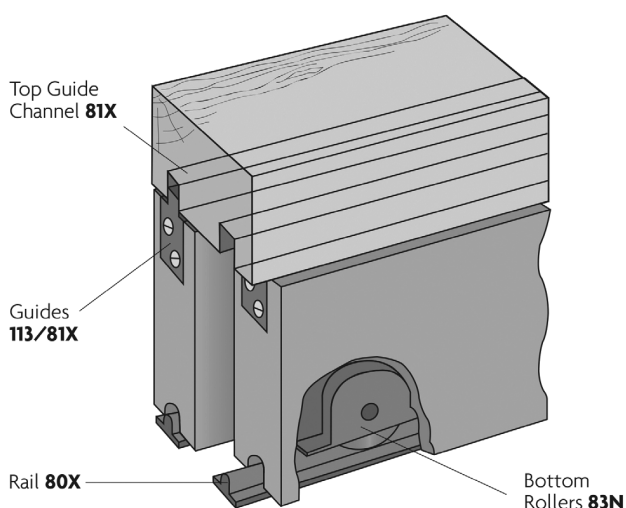

Kit	Door Width
27-789280	Loretto BTM. Roller Kit D4 - 2 Leaves - Max 1200mm
27-789314	Loretto BTM. Roller Kit D5 - 2 Leaves - Max 1500mm
27-789345	Loretto BTM. Roller Kit D6 - 2 Leaves - Max 1800mm

For cupboards, bookcases and other good quality cabinet work

For timber framed, glazed or flush doors

Quiet and smooth - nylon guides and rollers, with aluminium rail


Specification:

Max. door weight: 23kg

Max. door width: 900mm

Max. door height: 1800mm

Door thickness: 20-45mm

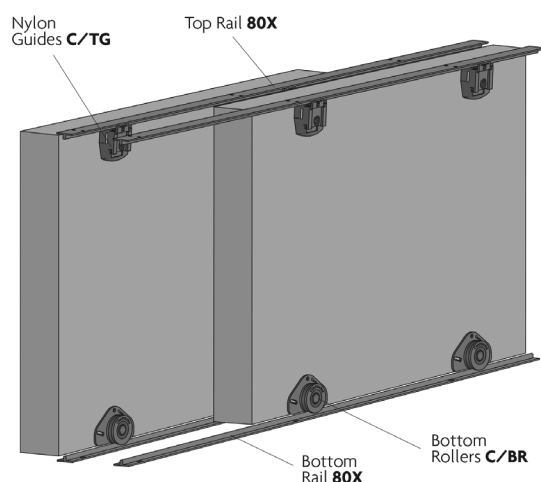
Cello**Cello For Sliding Wardrobe Doors up to 25Kg**

Kit	Door Width
27-780000	Cello 25Kg Btm/ Roller Kit C15 - 2 Leaves - max 1500mm
27-780001	Cello 25Kg Btm/ Roller Kit C18 - 2 Leaves - max 1800mm
27-780002	Cello 25Kg Btm/ Roller Kit C24 - 3 Leaves - max 2400mm

For cupboards and wardrobes
 For timber, timber framed or composite doors
 Quiet and smooth - nylon guides and rollers, with aluminium rail
 Easy to install - no routing required

Specification:

Max. door weight: 25kg
 Max. door width: 920mm
 Max. door height: 2400mm
 Door thickness: 16-40mm

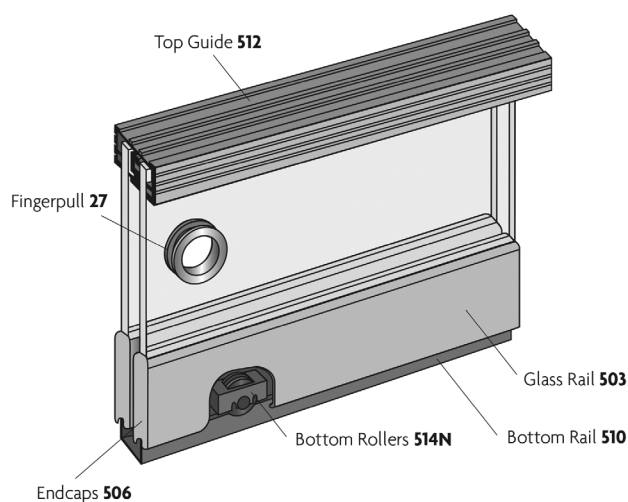Zenith**Zenith For Sliding Glass Doors up to 25Kg**

Kit	Door Width
27-790004	Zenith Btm. Roller Kit Z12 - 2 Leaves - Max 1200mm
27-790035	Zenith Btm. Roller Kit Z15 - 2 Leaves - Max 1500mm
27-790066	Zenith Btm. Roller Kit Z18 - 2 Leaves - Max 1800mm


For showcases, bookcases, display panels, hatches, interior windows and glass doors
 A precision made, satin-anodised finish aluminium gear with brush-pile strips
 Silent and easy to glide
 Optional extra cylinder locks
 - 507RH
 - 507LH

Specification:

Maximum door weight: 25kg
 Maximum door width: 900mm
 Maximum door height: 1800mm
 Maximum door area: 1m
 Maximum glass thickness: 6mm

Rustic 80

Sliding Wood Doors up to 80kg

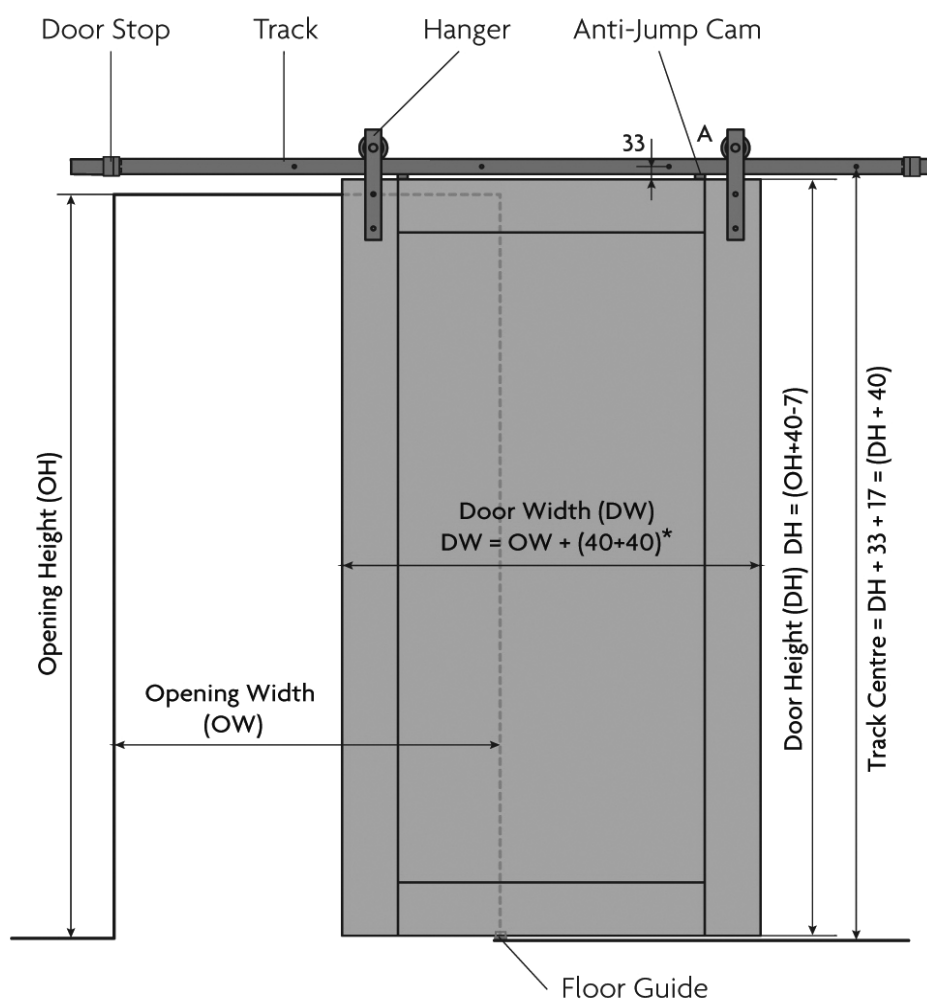

* PCH Suggests 40mm overlap of the door to the opening

Kit	Door Width
27-440160	Rustic 2M Kit R80-20 - 1000mm
27-440161	Rustic 3M Kit R80-30 - 1500mm
27-440165	Rustic 80 hanger kit

Creates a traditional look for sliding wooden doors

Exposed steel straps fasten down the front of the door to support the rustic finish

The beautifully crafted barn door style hangers run smoothly across a flat bar track

Robust black powder coat provides a durable finish

Nylon bearing wheels provide a smooth and silent running system

Easy to install

Available in 2m(R80/20) and 3m kits (R80/30)

Tested to 100,000 cycles

Additional kit available for 2 door installation

Includes black oval flush pull

Specification (2m Kit R80/20):

Max. door weight: 80kg

Min. door width: 500mm

Max. door width: 1000mm

Door thickness: 36 - 46mm

Specification (3m kit R80/30):

Max. door weight: 80kg

Min. door width: 500mm

Max. door width: 1500mm

Door thickness: 36 - 46mm

Sienna For Sliding Timber Doors up to 120Kg



Kit	Door Width
27-440014	Basic Kit 120Kg excludes track
27-440100	Sienna Timber Bar Assembly 2.0m (25/2000T)
27-440101	Sienna Timber Bar Assembly 2.5m (25/2500T)
27-440102	Sienna Timber Bar Assembly 3.0m (25/3000T)

Elegant timber door system which creates a minimalistic look

For timber doors of between 30 - 70mm thickness

Rollers engineered to run effortlessly along a brushed stainless steel tubular track

Stops are positioned on the track to limit the travel of the door

Specification:

Maximum door panel weight: 120kg


Door thickness: 30-70mm

Minimum panel width: 700mm

Maximum panel height: 2500mm

Sienna

Sienna For Sliding Glass Doors up to 120Kg

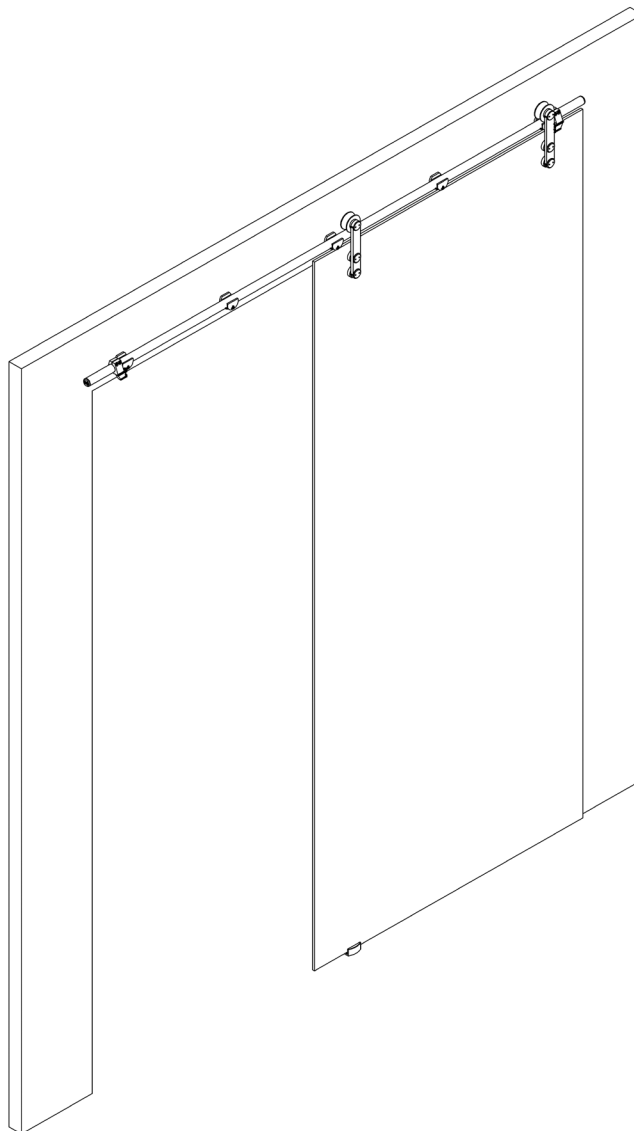

Kit	Door Width
27-440000	Basic Kit 120Kg excluding track
27-440005	Bar2.0m (requires 4 brackets)
27-440006	Bar2.5m (requires 5 brackets)
27-440007	Bar3.0m (requires 6 brackets)
27-440001	Face Fix Brackets for Solid Wall
27-440002	Face Fix Brackets for Glass Wall

Elegant frameless glass door system which creates a minimalistic look

120kg system designed for 8mm, 10mm and 12mm toughened glass

Rollers engineered to run effortlessly along a $\varnothing$ 25 x 7.5mm brushed stainless steel tubular track

Designed for use with glass door to glass wall or glass door to solid wall

Stops are positioned on the track to limit the travel of the door


Specification:

Maximum glass panel weight: 120kg

Glass panel thickness: 8mm, 10mm and 12mm

Maximum glass panel width: 1400mm

Maximum glass panel height: 2500mm

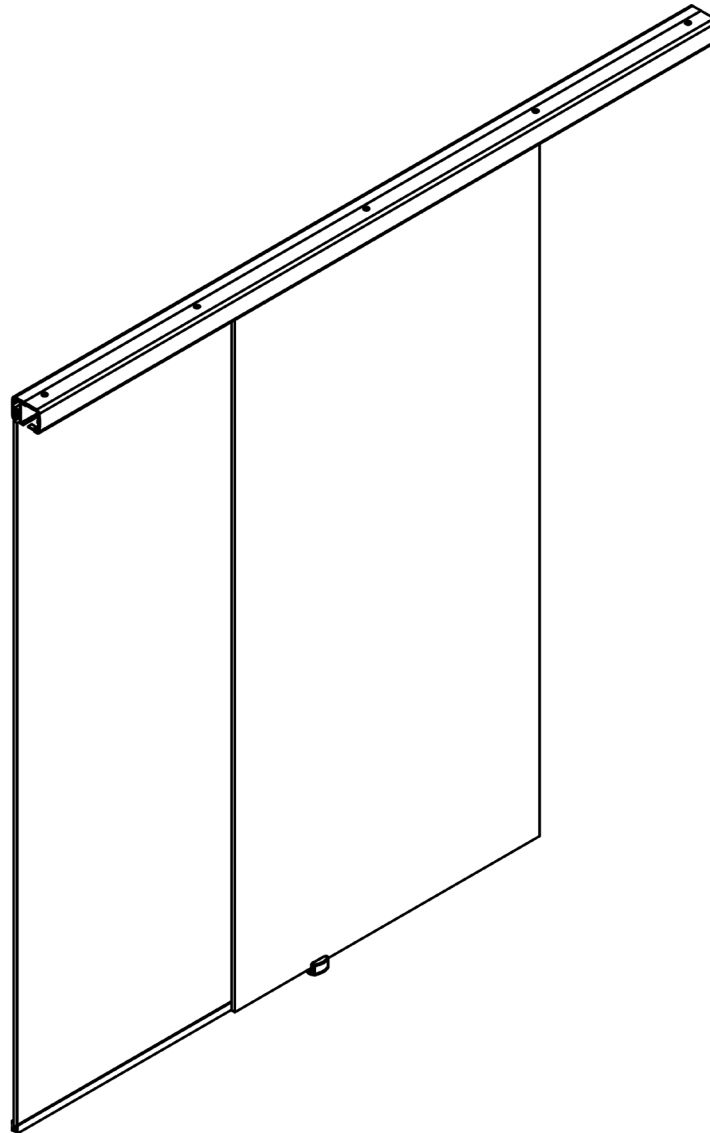

Kit	Door Width
27-669057	Velaro 80 Kit & Clip Stop 8mm Glass (V80/8)
27-669030	Velaro 80 Kit & Clip Stop 10 mm Glass (V80/10)
27-669031	Velaro 80 Kit & Clip Stop 12mm Glass (V80/12)
27-669210	Velaro 80 Kit & Single Soft Stop 8mm Glass (VS80/8)
27-669211	Velaro Kit & 80 Single Soft Stop 10mm Glass (VS80/10)
27-669212	Velaro Kit & 80 Single Soft Stop 12mm Glass (VS80/12)
27-669213	Velaro Kit & 80 Double Soft Stop 8mm Glass (VD80/8)
27-669214	Velaro Kit & 80 Double Soft Stop 10mm Glass (VD80/10)
27-669215	Velaro Kit & 80 Double Soft Stop 12mm Glass (VD80/12)
27-669136	Velaro 80 FACE FIX Track Pack 2.0mm (V80FF/2000)
27-669135	Velaro 80 FACE FIX Track Pack 2.5mm (V80FF/2500)
27-669134	Velaro 80 FACE FIX Track Pack 3.0mm (V80FF/3000)
27-669130	Velaro 80 FACE FIX Track Pack 6.0mm (V80FF/6000)
27-669146	Velaro 80 SOFFIT FIX Track Pack 2.0mm (V80SF/2000)
27-669145	Velaro 80 SOFFIT FIX Track Pack 2.5mm (V80SF/2500)
27-669144	Velaro 80 SOFFIT FIX Track Pack 3.0mm (V80SF/3000)
27-669140	Velaro 80 SOFFIT FIX Track Pack 6.0mm (V80SF/6000)
27-669156	Velaro 80 FIX PANEL Track Pack 2.0mm (V80FP/2000)
27-669154	Velaro 80 FIX PANEL Track Pack 3.0mm (V80FP/3000)
27-669150	Velaro 80 FIX PANEL Track Pack 6.0mm (V80FP/6000)

Compact glass clamp system creating a modern minimalistic finish with all parts concealed within the track

Designed for use with 8, 10 and 12mm toughened safety glass

For use with single sliding, glass interior doors

Soffit, face fix and soffit panel fix track option

Concealed fascia fix panel with integrated combination profile option

Brush strip receiver integrated into track to give a clean finish

Vertical adjustment of $\pm 3\text{mm}$

Bottom guide with brushed stainless steel finish and polymer roller system ensures a quiet smooth operation

Specifications:

Maximum door weight: 80kg

Maximum glass panel width: 1200mm

Maximum door height: 2500mm

Glass thickness: 8mm, 10mm and 12mm

Your Henderson Gear

Choosing Your Henderson Gear In 10 Easy Steps

- Determine application. Wardrobe, Cupboard, Cabinet, Room Divider
- Choose Sliding Doors (single doors) or Folding Doors (joined pair of doors)
- Choose fixing method. Face Fixed (onto side of wall) or Soffit Fixed (into lintel or wall cavity)

See drawing below for details.

- Measure width of opening and determine track length.

Face Fixed = width of opening x 2 (to allow for door parking space).

Soffit Fixed = width of opening.

= width of opening x 2 (for cavity sliding doors).

- Choose the doors and note material of door
- Measure width and thickness of each door.


Face Fixed note that the total width of all the doors should be slightly wider than the opening to prevent any gaps.

Soffit Fixed note that the total width of all the doors must be exactly equal to the width of the opening to allow proper closing.

- Identify how many doors you need.
- Identify the weight of each single door.
- Choose correct Henderson Residential gear and kit number.

Use the table and your information from questions 1-8.

- Fix your doors.

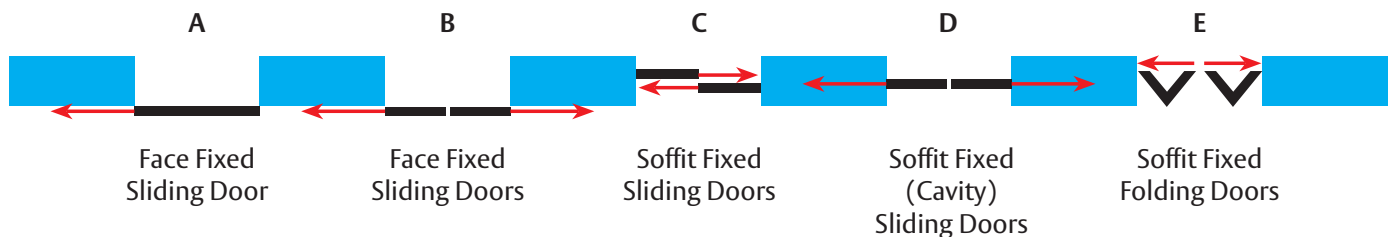

Sliding doors can be Face Fixed with single line of track which allows access to the full width of the opening - but you need wall space where the door(s) can park (A,B). Soffit Fixed with 2 lines of track which allows doors to by-pass each other, giving a partial opening (C). Soffit Fixed with single line of track for cavity installations (D).

Folding doors are normally Soffit Fixed where there is no wall space for the doors to slide to (E).

Pelmets. Fix a pelmet the length of the track to cover the track and hangers to give a pleasing appearance to your sliding doors.

NOTE: If the door weight exceeds the Residential Gear, choose Henderson Commercial or Industrial gear shown on www.henderson.co.za